

EMAX



torqu-LP

**STRENGTH
UNDER PRESSURE**

EMAX HYDRAULIC PUMPS

EMAX

ELECTRIC HYDRAULIC TORQUE WRENCH PUMP



THREE-STAGE PERFORMANCE

GET MAXIMUM PERFORMANCE FROM A MINIMUM WEIGHT HYDRAULIC TORQUE WRENCH PUMP. SET THE PRESSURE AND ACHIEVE THE TORQUE EVERY CYCLE.

TECHNICAL DATA

EMAX-115V / EMAX-230V

Reservoir Capacity (gal/litre)

2.2 / 8.4

Valve Style

Auto Retract

Motor Specification

2.2 hp / 1.6 kW

Weight (lbs/kg)

62 / 28

MAX OIL FLOW

EMAX-115V / EMAX-230V

Stage 1 (1000psi / 70bar)

610 cu.in/min

10.0 l/min

Stage 2 (3900psi / 270bar)

145 cu.in/min

2.4 l/min

Stage 3 (10,000psi / 700bar)

65 cu.in/min

1.1 l/min



DIMENSIONS

EMAX-115V / EMAX-230V

Length (in/mm)


16.5 / 419.1

Width (in/mm)

15.0 / 381.0

Height (in/mm)

16.0 / 406.4

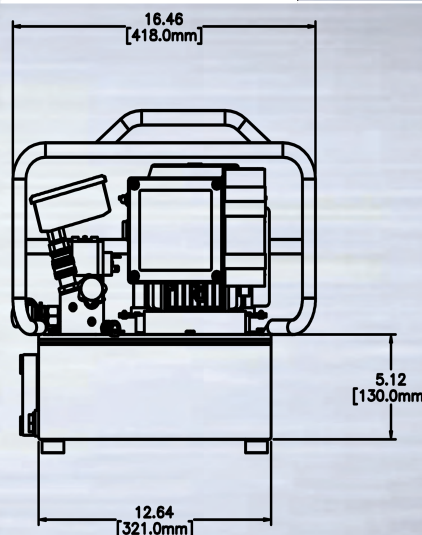

RESERVOIR DIMENSIONS

EMAX-115V / EMAX-230V

Length (in/mm)



12.6 / 320.0

Width (in/mm)

9.4 / 238.8

Height (in/mm)

5.1 / 129.5

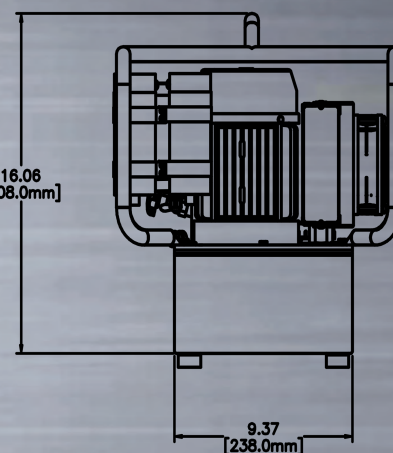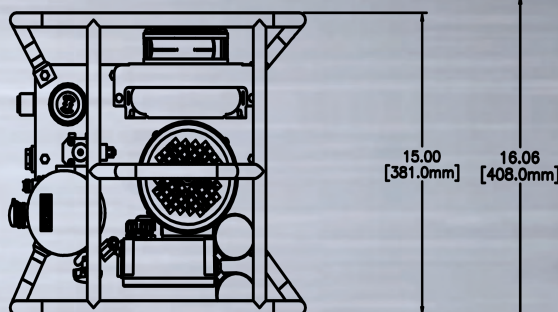

TWIN LINE
HYDRAULIC HOSE

MULTI- PORT
MANIFOLD



* HYDRAULIC HOSE AND MULTI- PORT MANIFOLD SOLD SEPARATELY

TorcUP Inc. 1025 Conroy Place Easton, PA. 18040 USA 1-888-TorcUP-1 +1 610-250-5800