

▼ Shown: XC-1201



- **Lightweight design with integrated handle and carrying strap for portability**
- **Bladder reservoir prevents contamination and allows pump usage in any position**
- **Powerful ½ horsepower motor and 28-volt Lithium-Ion battery deliver exceptional speed and run time**
- **High-strength fiberglass reinforced composite shroud for superior durability in demanding job site environments**
- **Cordless technology eliminates tripping hazards found in other electric or air powered pumps**
- **Available in both single-acting and double-acting valve configurations**



Performance of a Powered Pump

Portability of a Hand Pump



GA45GC Gauge Adaptor

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: 144



Battery packs contain no cadmium, so they are environmentally friendly. Enerpac encourages recycling.



28-Volt Battery

The XC-28V with Lithium-Ion technology for maximum battery performance.



Battery Charger

1-hour quick charger.

XC-115VC	115 VAC
XC-230VC	230 VAC



Hydraulic Swivel Connector

Customer installed swivel connector for optimal orientation of the hydraulic hose.

Order model number ¹⁾	XSC1
----------------------------------	------

¹⁾ Accessories must be ordered separately.

◀ Power and simplicity for the toughest jobs.

Cordless Hydraulic Pump



XC-Series Cordless Hydraulic Pump

The XC-Series cordless pump is ideal for jobs that require a combination of portability, speed, and safety. These cordless pumps are perfect for remote locations without access to power, but also indoors where trip hazards, ergonomics or size is a concern. The XC-Series cordless pump is compatible with all Enerpac hydraulic tools and small to medium sized cylinders.

The Lithium-Ion battery provides superior run time, even under extreme job site conditions.*

- 279 cuts of 3/8 inch reinforcing bar using the WHC-750 Cutter
- 112 lifts with the WR-5 Spreader
- 44 splits on 1-inch, grade 8 nuts using the NC-3241 Nut Splitter
- 28 lifts of an RC-104

The XC-Series cordless pump is CSA and CE compliant.

*Actual number of cycles per charge will vary depending on condition of tool, battery and ambient conditions. Battery life with double-acting tools is approximately 75% of that for comparable, single-acting tools.



XC Series



Reservoir Capacity:

60-120 in³



Flow at Rated Pressure:

15 in³/min.


Maximum Operating Pressure:

10,000 psi

- ① Outlet "Advance" Port
- ② Oil Fill (must use funnel)
- ③ User-Adjustable Relief Valve Access Port
- ④ Directional Control Valve
- ⑤ Shoulder Strap Connection Points
- ⑥ Safety Lock Feature
- ⑦ On/Off Switch
- ⑧ Inlet "Retract" Port (double-acting models only)

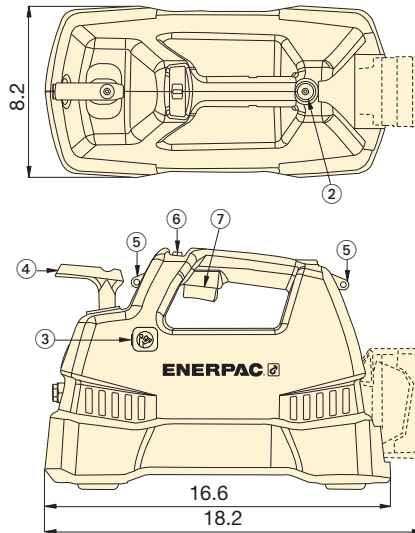

OIL FLOW vs. PRESSURE

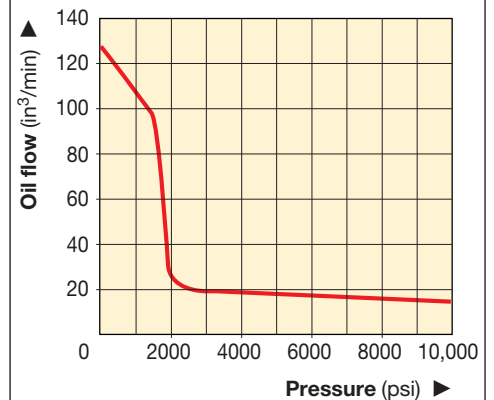

Oil Capacity (in ³)	Model Number	Output Flow Rate (in ³ /min)			Valve Function	Charger Voltage (VAC)	Weight (lbs)
		No Load	2000 psi	10,000 psi			
60	XC-1201MB	125	30	15	3-way, 2-pos.	115	21.9
120	XC-1202MB	125	30	15			23.8
60	XC-1201ME	125	30	15	3-way, 2-pos.	230	21.9
120	XC-1202ME	125	30	15			23.8
60	XC-1201M*	125	30	15	3-way, 2-pos.	-	21.9
120	XC-1202M*	125	30	15			23.8
60	XC-1401MB	125	30	15	4-way, 3-pos.	115	22.3
120	XC-1402MB	125	30	15			24.2
60	XC-1401ME	125	30	15	4-way, 3-pos.	230	22.3
120	XC-1402ME	125	30	15			24.2
60	XC-1401M*	125	30	15	4-way, 3-pos.	-	22.3
120	XC-1402M*	125	30	15			24.2

* Batteries and charger not included.

▼ Take the battery pump anywhere without power cords or air hoses.

