
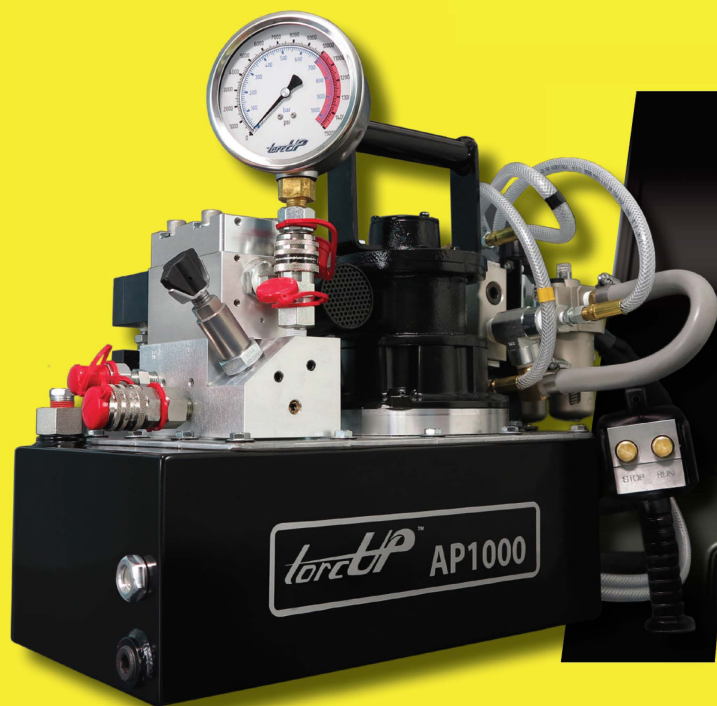


EP

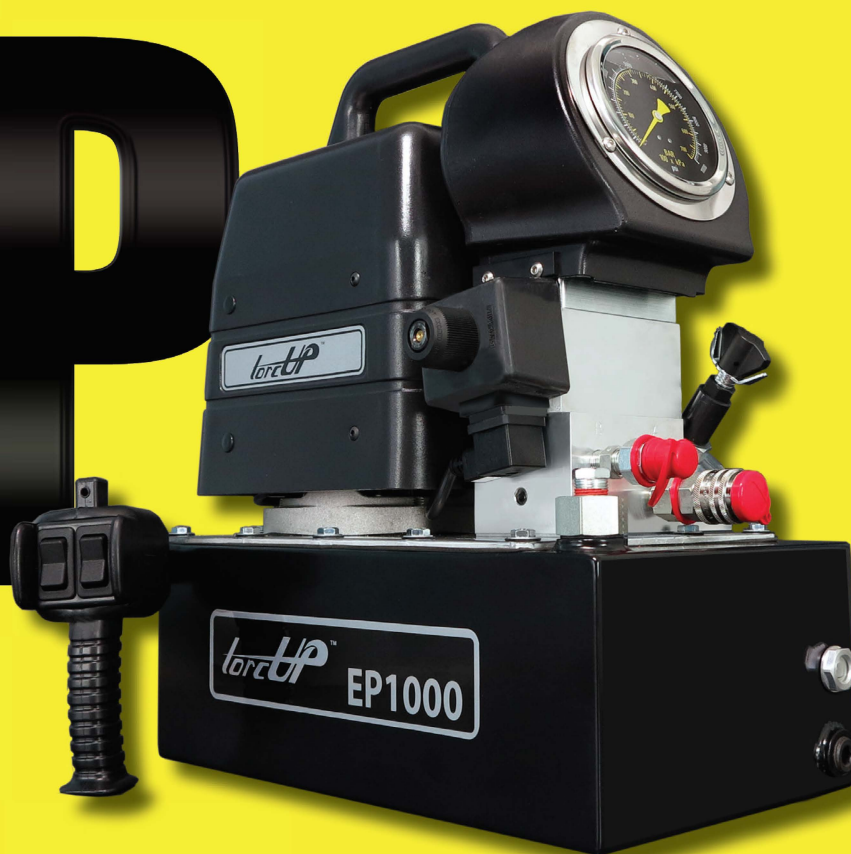

AP

torcUP

STRENGTH

UNDER PRESSURE

APPLIED
TORQUE
.co.uk


EP/AP HYDRAULIC PUMPS

EP**ELECTRIC HYDRAULIC
TORQUE WRENCH PUMP****ELECTRIC PERFORMANCE**

THE EP SERIES HYDRAULIC TORQUE WRENCH PUMP IS MANUFACTURED TO WITHSTAND HARSH ENVIRONMENTS AND HEAVY DUTY APPLICATIONS. ADJUST THE PRESSURE TO THE DESIRED PSI/BAR TO ACHIEVE PROPER TORQUE OUTPUT EACH AND EVERY TIME. WHETHER RUNNING ONE TOOL OR FOUR, THE EP SERIES PUMPS ARE THE POWER THAT GUARANTEES THE JOB WILL GET DONE.



Dimensions	All dimensions are the same for 230v models		
	EP500	EP1000	EP1000-Q
A (in/mm)	13.0/330	15.0/381	17.0/432
B (in/mm)	8.2/208	8.7/221	9.7/246
C (in/mm)	19.0/483	19.0/483	19.0/483
D (in/mm)	5.7/145	5.9/150	5.9/150

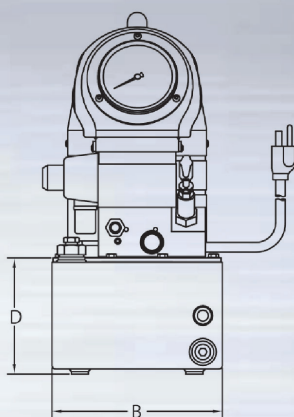**Technical Data**

Reservoir Capacity (gal/litre)

Valve Style

Motor Specification

Flow Rate @ 1,100psi


Flow Rate @ 10,000psi

Weight (lbs/kg)

AMPS

EP500**EP1000****EP1000-Q**

1.0/3.8	1.5/5.7	2.5/9.5
Auto Retract	Auto Retract	Auto Retract
1.125 HP @ 115VAC Single Phase	1.5 HP @ 115VAC Single Phase	1.5HP @ 115VAC Single Phase
525 cu.in./min.	700 cu.in./min.	700 cu.in./min.
48 cu.in./min.	55 cu.in./min.	55 cu.in./min.
59.0/26.8	74.0/33.6	81.0/36.7
12-13	17-18	17-18

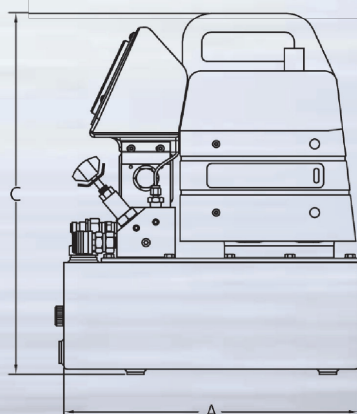**Technical Data**

Reservoir Capacity (gal/litre)

Valve Style

Motor Specification

Flow Rate @ 75 bar

Flow Rate @ 700 bar

Weight (lbs/kg)

AMPS

EP500-230V**EP1000-230V****EP1000-Q-230V**

1.0/3.8	1.5/5.7	2.5/9.5
Auto Retract	Auto Retract	Auto Retract
1.125 HP @ 230VAC Single Phase	1.5 HP @ 230VAC Single Phase	1.5 HP @ 230VAC Single Phase
8.6 litres/min	11.5 litres/min.	11.5 litres/min.
.79 litres/min.	.9 litres/min.	.9 litres/min.
59.0/26.8	74.0/33.6	81.0/36.7
12-13	17-18	17-18